


## Essencia Ceramic Cartridge Installation Instructions

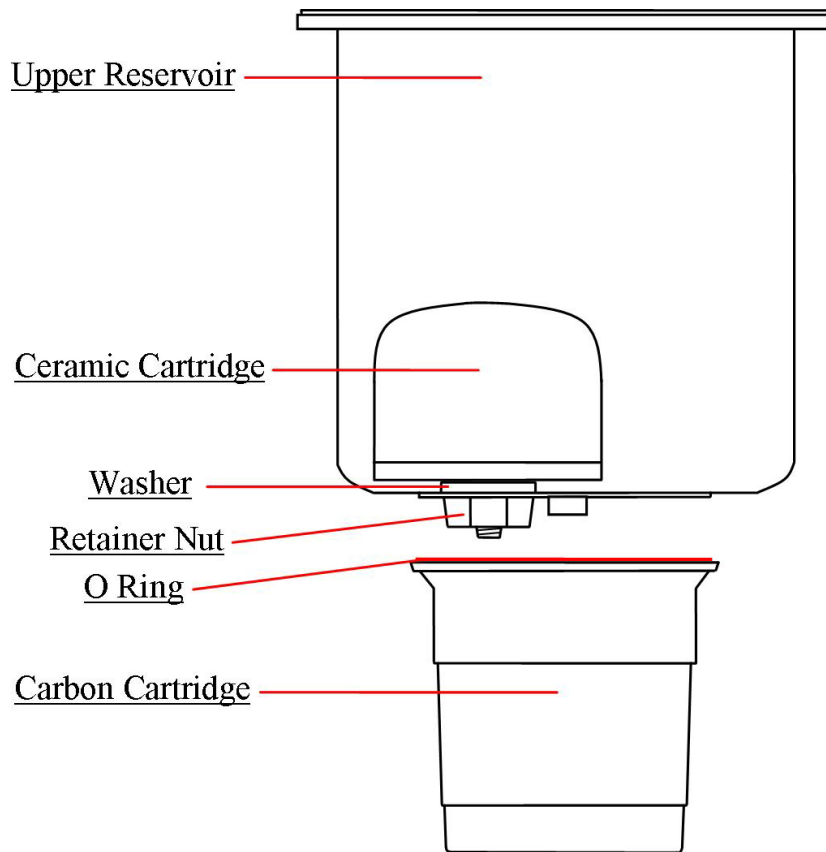

The Ceramic Cartridge is fragile. Handle it with care. • Prime the Cartridge by soaking it in water for 2 hours or overnight.

When soaking, ensure the plastic nozzle of the Cartridge is pointing upwards and is above the water level. This allows air to escape, avoiding the chance of an airlock. • Fit the Ceramic Cartridge into the upper reservoir ensuring the washer sits between the base of the cartridge and the inside of the upper reservoir.

- Fit the retainer nut to the outlet of the Ceramic Cartridge being careful not to over tighten it.
- The Ceramic Cartridge will need cleaning periodically.
- Remove the Cartridge and clean the surface with either a hard bristle brush or a pot scrubber under running water.
- The Ceramic Cartridge will treat approximately 50 batches before replacement is required.

**Note:** Cleaning and replacement intervals will be affected by the quality of the product being filtered.